


# BW-1200-3000VA



# BW-600-1000VA

## BW-1200-3000VA


- AC input.
- Output Socket (selectable).
- TEL/Modern/Fax surge protection (RJ11/RJ45) (optional).
- USB/RS232 communication (optional).
- AC Fuse/Breaker (optional).

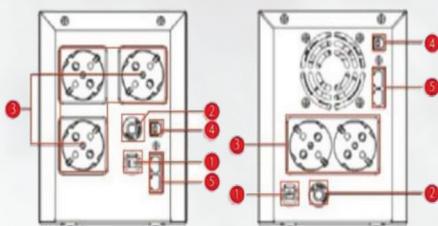

- 1 Ac Input
- 2 AC Input fuse/ Breaker
- 3 Output Receptacles
- 4 USB Connector (Optional)
- 5 Network surge protection (Optional).

## BW-600-1000VA

- AC input.
- Output Socket (selectable).
- TEL/Modern/Fax surge protection (RJ11/RJ45) (optional).
- USB/RS232 communication (optional).
- AC Fuse/Breaker (optional).

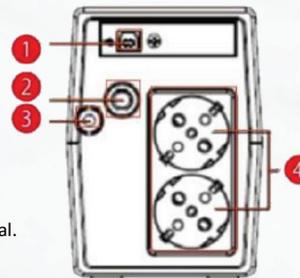

- 1 USB Connector (Optional)
- 2 AC Input Breaker
- 3 AC Input
- 4 Output Receptacles

## Main Features


- LCD display or LED display for option.
- Excellent microprocessor control optimizes reliability.
- Built super smart charger, shorten charging time.
- Boost and buck AVR for voltage stabilization.
- Simulated sine wave.
- Auto restart while AC is recovering.
- Power - on self test.
- Built-in self-diagnostic function.
- Off mode charging function .
- Intelligent battery management.
- Optional no-load shut down .
- Humanized alarm system .
- Compatible with generator set (optional).
- Optional RS23/USB communication port and RJ11/RJ45 protection.

## Specifications :

MODEL	BW600	BW800	BW1000
Capacity	600VA/360W	800VA/480W	1000VA/600W
<b>INPUT</b>			
Voltage	220VAC		
Voltage Range	140-300 VAC		
<b>OUTPUT</b>			
Voltage Regulation	+/-10%		
Transfer Time	Typical 2-6ms.10ms max		
Waveform	Simulated Sine Wave		
<b>BATTERY</b>			
Type & Number	12V/AH x 1	12V/9AH x 1	
Charging Time	5 Hours recover to 90% capacity		
<b>PHYSICAL</b>			
Dimension D*W*H(mm)	297x101x142		
Net Weight (kgs)	4.2	4.9	5.1
<b>ENVIRONMENT</b>			
Humidity	0-90% RH @0-40C (non-condensing)		
Noise Level	Less than 40 dB		

## Rear Panel :

- AC input.
- Output Socket (selectable).
- TEL/Modern/Fax surge protection (RJ11/RJ45) (optional).
- USB/RS232 communication (optional).
- AC Fuse/Breaker (optional).

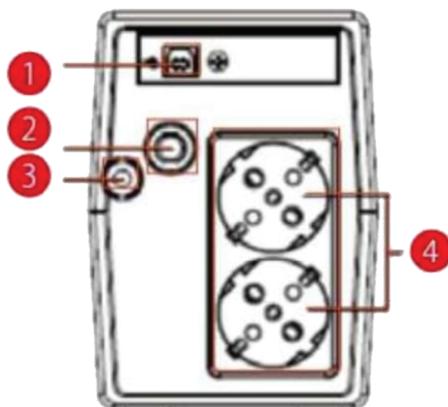

- 1 USB Connector (Optional)
- 2 AC Input Breaker
- 3 AC Input
- 4 Output Receptacles

All Specifications subject to change without notice

Custom-made specifications are acceptable




## Specifications :

MODEL	BW1200	BW1500	BW2000	BW3000
Capacity	1200VA/720W	1500VA/900W	2000VA/1200W	3000VA/1800W
<b>INPUT</b>				
Voltage	220VAC			
Voltage Range	140-290 VAC / 140-300VAC		140-268 VAC / 170-280VAC	
<b>OUTPUT</b>				
Voltage Regulation	+/-10%			
Transfer Time	Typical 2-6ms, 10ms max			
Waveform	Simulated Sine Wave			
<b>BATTERY</b>				
Type & Number	12V/7AH x 2	12V/9AH x 2		12V/9AH x 4
Charging Time	6 Hours recover to 90% capacity			
<b>PHYSICAL</b>				
Dimension D*W*H(mm)	370x138x166			466X138X166
Net Weight (kgs)	9	10	11	19
<b>ENVIRONMENT</b>				
Humidity	0-90% RH @0-40C (non-condensing)			
Noise Level	Less than 40 dB			

## Rear Panel :

- AC input.
- Output Socket (selectable).
- TEL/Modern/Fax surge protection (RJ11/RJ45) (optional).
- USB/RS232 communication (optional).
- AC Fuse/Breaker (optional).

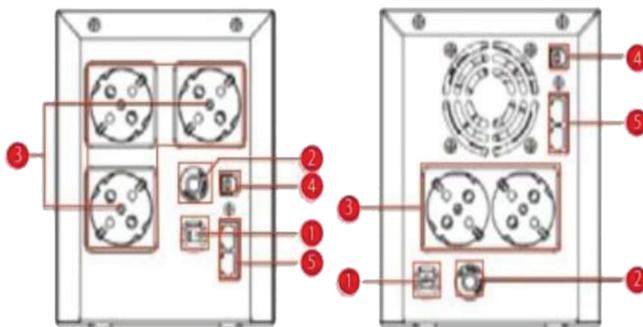

- 1 Ac Input
- 2 AC Input fuse/ Breaker
- 3 Output Receptacles
- 4 USB Connector (Optional)
- 5 Network surge protection (Optional).

All Specifications subject to change without notice

Custom-made specifications are acceptable

